ULTRAMAR WATER

FLEXIBILITY MEETS SUSTAINABILITY

8″ Spiral Wound Nanofiltration Elements

Description:


Low Pressure, High Productivity: Low pressure application for nanofiltration

Specifications:

Model	Permeate Flow GPD(m^3 / day)	Active Membrane Area $ft^2(m^2)$	Stabilized Salt Rejection	Minimum Salt Rejection	Feed spacer mil(mm)	Test Conditions
NF-8040-400-N9	9500(36)	400(37)	99%	98%	34(0.85)	70psi/2000ppm MgSO4
	10800 (41)		95%	90%		70psi/500ppm NaCl

1. All performance data are collected at 25°C (77°F), pH7.5 and 15% recovery rate.
2. Permeate flows for single element may vary ±15%.

Element Dimension:

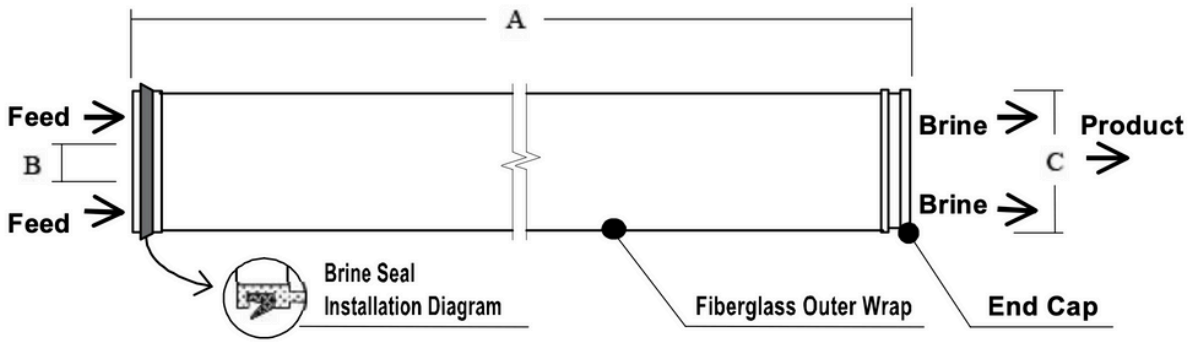

Product	Dimensions – Inches (mm)		
	A	B	C
NF-8040-400-N9	40.0 (1016)	1.125 (29)	7.9 (201)

* 1 inch= 25.4 mm

Operating Limits for Design:

Maximum Operating Temperature..... 45°C(113°F)
Maximum Operating Pressure..... 600psi(41bar)
Maximum Pressure Drop (single element)..... 15psi(1.0bar) pH
Range for Continuous Operation..... 3-10 pH
Range for Cleaning..... 2-11
Chlorine tolerance..... <0.1ppm
Maximum Feed SDI..... 5