ULTRAMAR WATER

FLEXIBILITY MEETS SUSTAINABILITY

2.5″ Spiral Wound Elements for Brackish Water

Description:

Low Pressure, High Productivity:
Low or ultra low pressure application for brackish water treatment


Specifications:

Model	Permeate Flow GPD(m^3/day)	Active Membrane Area ft^2(m^2)	Stabilized Salt Rejection	Feed spacer mi l (mm)	Test Conditions
ULP-2540	758(2.9)	27(2.5)	99.2%	28(0.7)	150psi/2000ppm NaCl

1. All performance data are collected at 25°C (77 F), pH7.5 and 15% recovery rate.
2. Permeate flows for single element may vary ±15%.

Element Dimension:

* Unit: Inch (mm)
1 inch= 25.4 mm

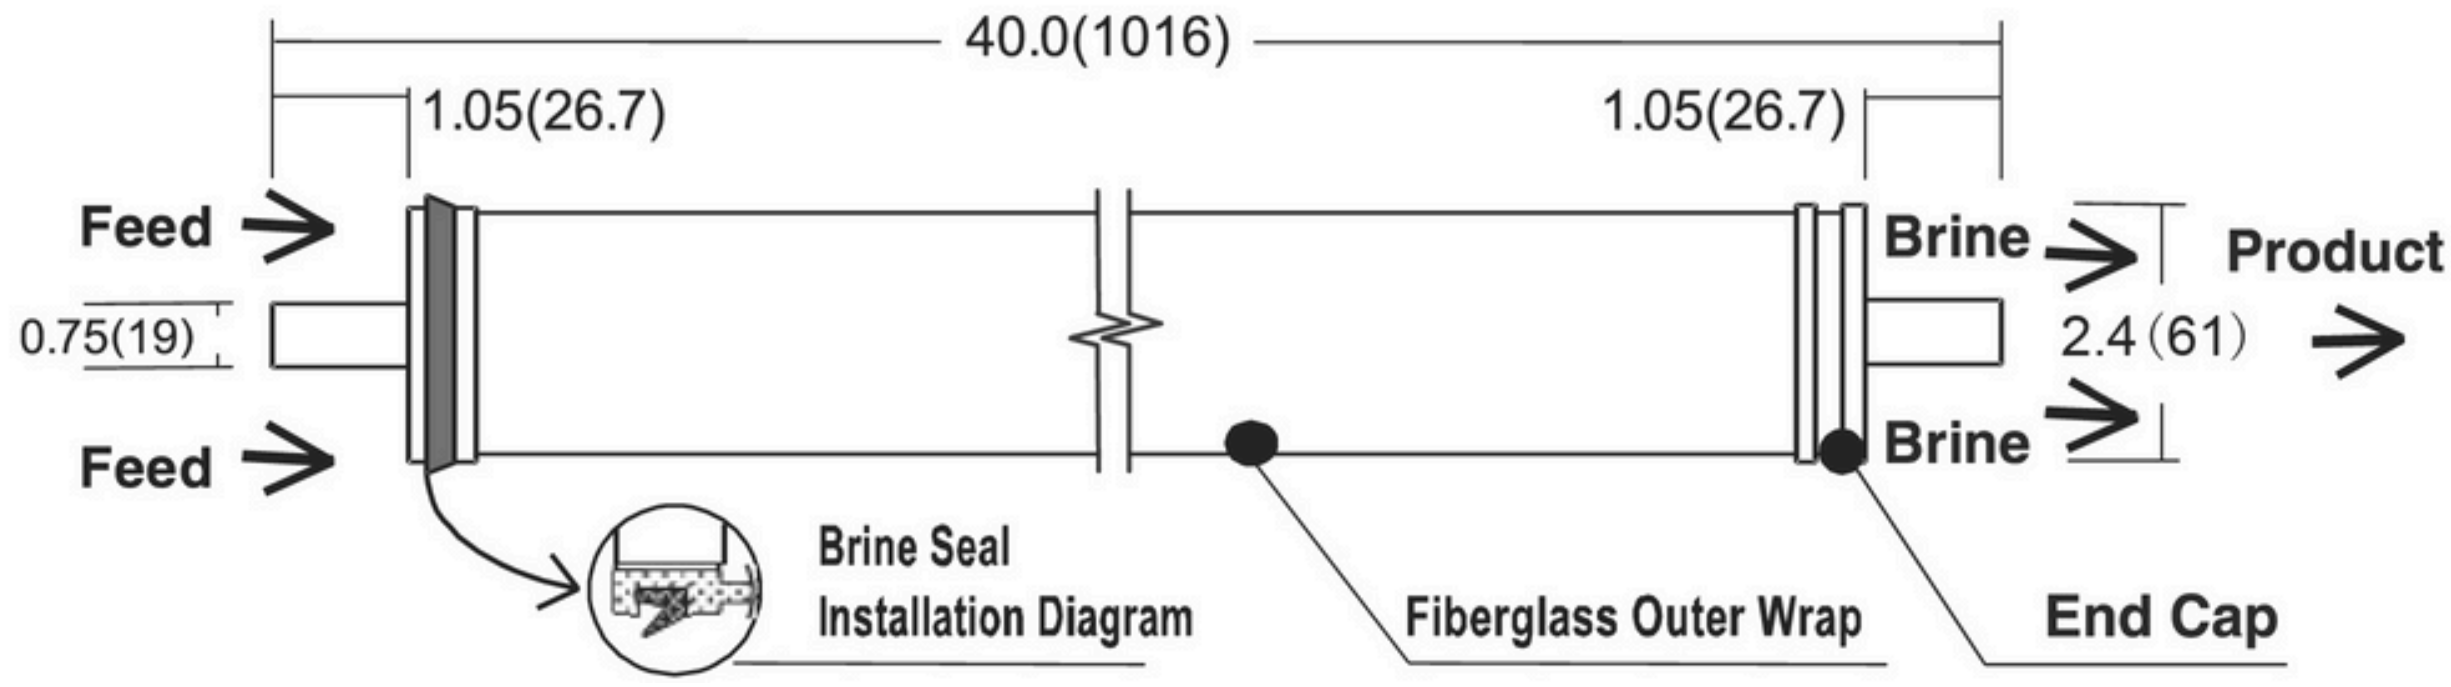

Operating Limits for Design:

Maximum Operating Temperature……….…………….……..…… 45°C(113°F)
Maximum Operating Pressure…………….……………………….. 600psi(41bar)
Maximum Pressure Drop (single element)………………………… 15psi(1.0bar)
pH Range for Continuous Operation…………………….............. 2-11 pH
Range for Cleaning…………………………………………....….. 2-12 Chlorine
tolerance…………………………………………………...........….. <0.1ppm
Maximum Feed SDI………………………………........…………… 5